

KTS65



KS60





KT65



KT62



材 质	KTS65---不锈钢(SUS 304)
	KS60---不锈钢(SUS 304)
	KT65---中碳钢
	K62---中碳钢
	盘垫---橡胶
表面处理	KTS65、KS60---底座外观光面处理
	KT65、K62---染黑
功 能	防滑
	KTS65/KT65---螺杆可旋转活动。 KS60/K62---螺杆固定
备 注	螺母需另外购买

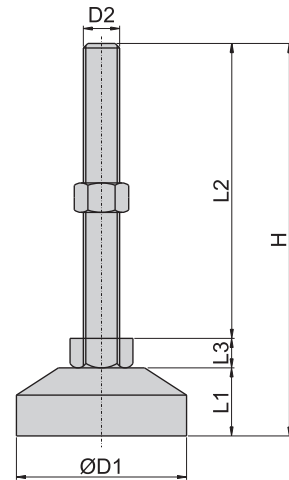

螺母编号	材 质	螺丝规格 mm/inch	对 边 D3/mm	螺母高度 h/mm
SM16	SUS 304	M16 × P2.0	24	13
SM20		M20 × P2.5	30	16
5/8" (B)	钢 (电著涂 装黑色)	5/8"--11WT	23	13
M20 (B)		M20 × P2.5	30	16
M16 (B)		M16 × P2.0	24	13

脚
座

产品编号	规 格	螺丝材料	底座直径 (未加橡胶盘垫) D1/mm	底座直径 (加橡胶盘垫) D1/mm	底座高度 (加橡胶盘垫) L1/mm	螺母高度 L3/mm	螺丝规格 D2/mm/inch	螺丝长度 L2/mm	总 高 H/mm	荷 重 kg
KT6516100	活动	中碳钢	62	70	25	10	M16 × P2.0	100	135	500
KT6516125								125	160	
KT6516150								150	185	
KTS6516100		SUS304						100	135	1000
KTS6516150								150	185	
KTS6520150								M20 × P2.5	150	
K625100	固定	中碳钢	60	67	25	10	5/8"--11WT	100	135	500
K625150								150	185	
K6216100								100	135	
K6216150		150					185	1000		
KS6016100		SUS304					M16 × P2.0		100	135
KS6016150							150		185	